

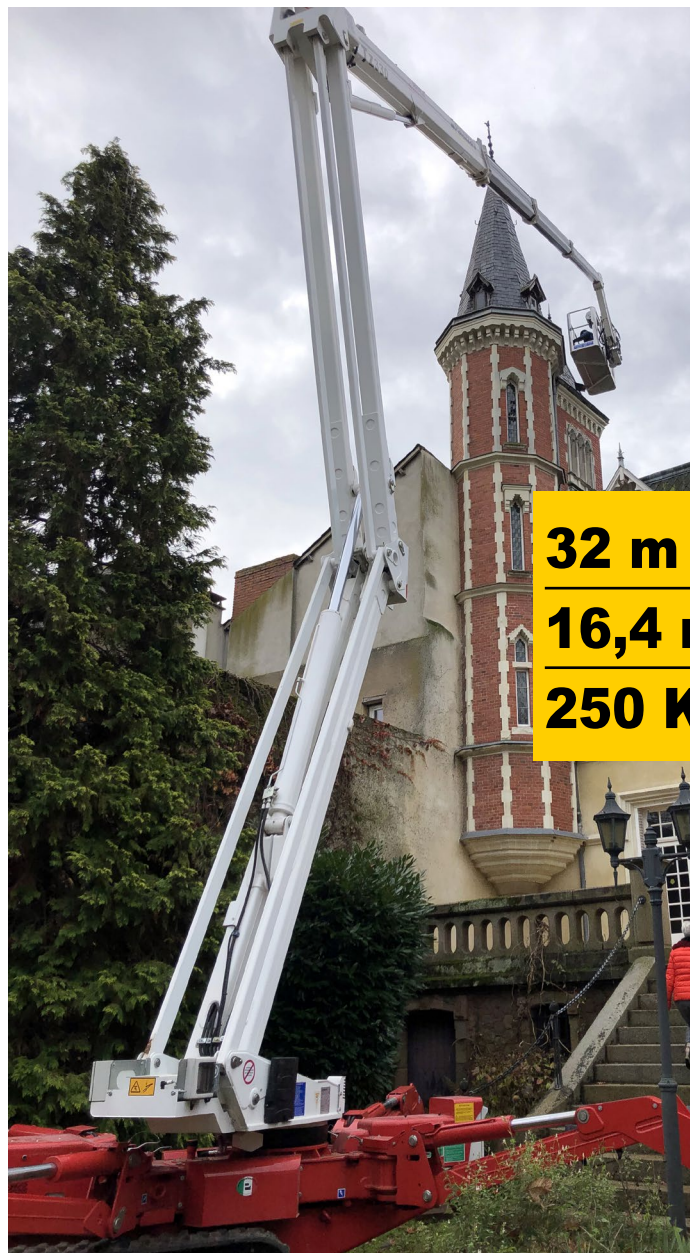
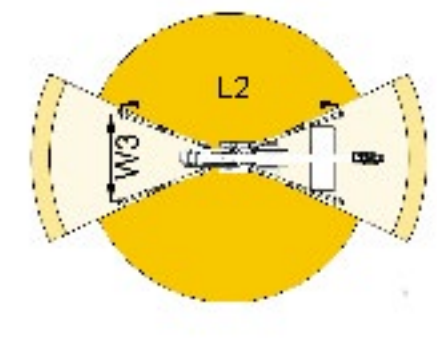
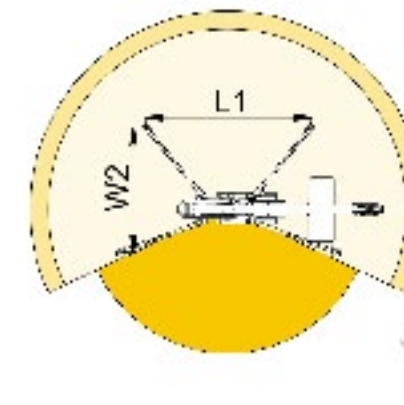
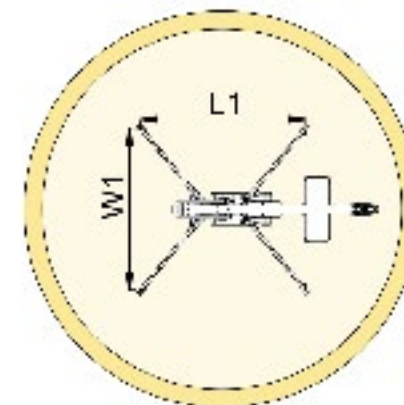


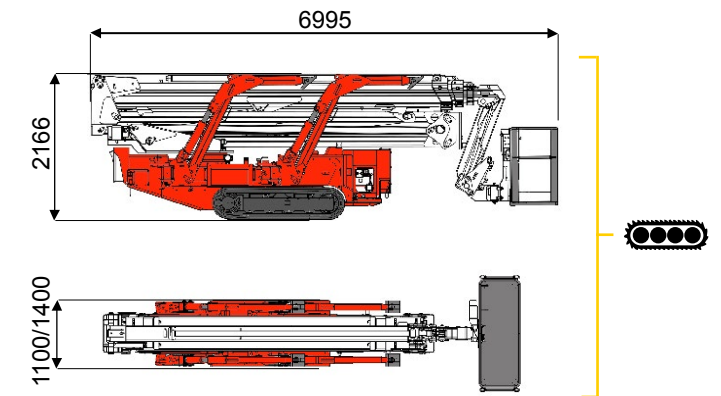

32 m ↑
16,4 m →
250 Kg 🧑🧑

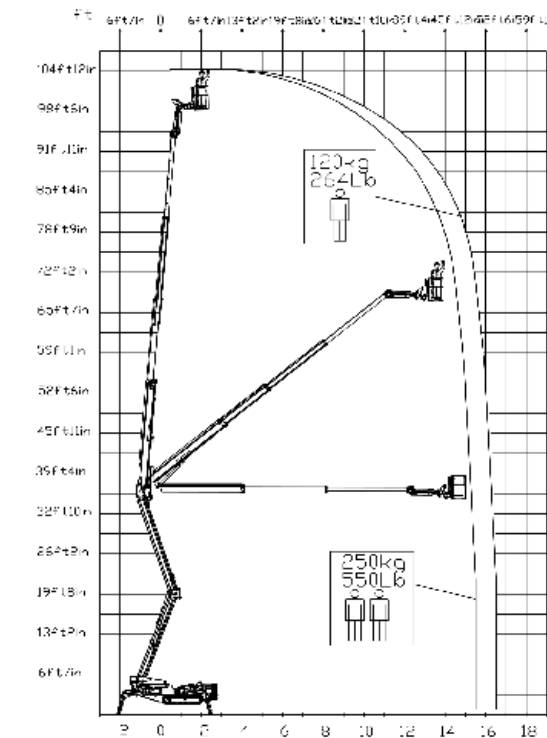

15,4 m	16,4 m	9,5 m	L1	L2	W1	W2	W3
250 kg	120 kg	120/250 kg	4725 mm	6170 mm	4910 mm	4020 mm	3130 mm

BI-ENERGY
Diesel+AC



TZ 330⁺/C



32 m

16,4 m

10,5 m

250 kg

110°

660°

180x70 cm

90°+90°

3,13-4,91 m

18%

32%

2,4 km/h

6700 kg

49 kN

2,89 kN/m²

5,32 kN/m²

Available version:

BI-ENERGY (DIESEL+AC)

ECO (DC+AC)

HYBRID (DIESEL+DC)

Characteristics and technical data are informative only and subjected to change without notice.

Palazzani
INDUSTRIE

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =



Palazzani Industrie S.p.A.
Via del Pavione, 4 - 25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073
platforms@palazzani.it
www.palazzani.it

NC 681 A 19